

LEDIGLICH ZUR INFORMATION

Code, die zur Identifizierung von PCT-Vertragsstaaten auf den Kopfbögen der Schriften, die internationale Anmeldungen gemäss dem PCT veröffentlichen.

AT Österreich
 AU Australien
 BB Barbados
 BE Belgien
 BF Burkina Faso
 BG Bulgarien
 BJ Benin
 BR Brasilien
 CA Kanada
 CF Zentrale Afrikanische Republik
 CG Kongo
 CH Schweiz
 CI Côte d'Ivoire
 CM Kamerun
 CS Tschechoslowakei
 CZ Tschechischen Republik
 DE Deutschland
 DK Dänemark
 ES Spanien

FI Finnland
 FR Frankreich
 GA Gabon
 GB Vereinigtes Königreich
 GN Guinea
 GR Griechenland
 HU Ungarn
 IE Irland
 IT Italien
 JP Japan
 KP Demokratische Volksrepublik Korea
 KR Republik Korea
 LI Liechtenstein
 LK Sri Lanka
 LU Luxemburg
 MC Monaco
 MG Madagaskar
 ML Mali
 MN Mongolei

MR Mauritien
 MW Malawi
 NL Niederlande
 NO Norwegen
 NZ Neuseeland
 PL Polen
 PT Portugal
 RO Rumänien
 RU Russische Föderation
 SD Sudan
 SE Schweden
 SK Slowakischen Republik
 SN Senegal
 SU Soviet Union
 TD Tschad
 TG Togo
 UA Ukraine
 US Vereinigte Staaten von Amerika
 VN Vietnam

Reaction Temperature Control Device

5 The present invention relates to temperature control devices, and in particular to devices for controlling the temperature of substances undergoing chemical reaction.

10 Many chemical reactions, in particular biochemical reactions, require the temperature of the reacting mixture to be controlled within close limits during the reaction to ensure the requisite yield and purity of product. It may also be necessary to vary the reaction temperature according to a predetermined temperature profile during the reaction. Two particular types of reaction that require close, variable temperature control are polymerase chain reactions (PCR) and Ligase chain reactions (LCR). In the case of the latter heating at a set temperature lasts for only 5-10
20 seconds before a new heating temperature must be selected. Such stringent criteria require the temperature control device to be able to heat and cool the reaction mixture very quickly and very accurately.

25 Such a temperature control device is described in International Patent Application No. WO/PCT/GB89/00323 (DEAN and EVANS). This Application discloses a device for controlling the temperature of a plurality of samples of a reacting mixture, comprising a heater
30 block for receiving said samples, means for heating the block, means for cooling the block by forced convection, and temperature sensing means to monitor the temperature of one or more samples and signal a controller which controls the means for heating and the
35 means for cooling to regulate the sample temperature.

The block is heated by a quartz-halogen lamp directly below the block which gives out radiant heat. This is directional and because of this the heating of the block is not always uniform. This can result in hot spots and limits the number of samples the device can hold.

Accordingly, a first aspect of the invention provides a device for controlling the temperature of a plurality of samples of a reacting mixture, comprising a heater block for receiving said samples, means for heating the block, means for cooling the block by forced convection, and temperature sensing means to monitor the temperature of one or more samples and signal a controller which controls the means for heating and the means for cooling to regulate the sample temperature, characterised in that the means for heating the block comprise one or more heater elements positioned in thermal contact with the block so that heat transfer between the element(s) and the block is substantially by conduction.

This provides even heating of the samples.

The known device is cooled by a fan under the block. The location of the lamp means that the fan must be positioned to one side of the block. This causes uneven cooling of the test tubes.

In a preferred arrangement of the first aspect of the invention, the means for cooling the block by forced convection comprises a fan that is positioned under the centre of the block.

Such symmetrical positioning ensures even cooling of

the samples.

In the known device the block is made from a drilled sheet of copper in which copper tubes are soldered.
5 This makes the block difficult and expensive to construct. Furthermore the soldered joints can disrupt heat conduction.

Preferably, in the first aspect of the invention the
10 block is made of solid metal.

This further ensures even heat distribution. The block can be easily made by electroforming .

15 The known device uses thermocouples which limits the accuracy of the temperature control and necessitates periodic recalibration of the controller.

Preferably, in the first aspect of the invention the
20 temperature sensing means comprises one or more thermistors.

In order that the invention and its various other features may be understood more easily,
25 embodiments thereof will now be described by way of example only, with reference to the drawings, wherein:-

Fig.1 is a vertical section through a control device according to a first embodiment of the present
30 invention;

Fig.2 is a horizontal section through a part of the heater block comprising part of the first embodiment;
and

Fig.3 is a vertical section through a second embodiment of the invention.

5 The device comprises a casing 10, a rectangular heater block 20, a heater block support 40, a fan 50, and a collar 60. The device further comprises a controller and temperature sensing means which are not shown in the drawings.

10 The heater block 20 is electroformed and comprises a single continuous layer of silver. The block contains ninety six recesses 21 into which small test tubes (not shown in drawings) containing the reactant mixture are inserted. The recesses form projections on the
15 underneath of the block. The arrangement of the recesses conforms with that of a standard size ninety six well microtitre dish (126 mm x 86 mm nominal).

20 The heater block 20 is heated by a serpentine electric element 22 that extends between the recesses. The element winds back and forth along the rows of recesses 21. The element 22 is formed from a sheathed conductor.

25 The underside of the heater block 20 is cooled by a fan 50. The outlet 51 of the fan is directed towards the centre underneath the heater block.

30 The heater block 20 is supported by the heater block support 40 which is plastic and which is supported by the casing 10. The plastic collar 60 forms part of and hangs from the support 40.

35 The device is controlled by a controller that is responsive to two thermistor units placed one in

thermal contact with the recesses 21 underneath the block, and another in a, dummy test tube within a recess.

5 The device, particularly the support 40 and collar 60, is configured to provide an even airflow over the base of the heater block 20, to ensure uniform cooling of the samples. The airflow path is indicated by arrows in Fig.1. Louvres 11 are provided in the casing 10 to
10 allow hot air to escape.

The device is particularly suited to undertaking biochemical reactions. The reactant samples are contained in polypropylene sample tubes which each
15 contain a sample of about 100 microlitres. The tubes are inserted into the recesses and can be filled in situ using a multiheaded pipette. The device can achieve block heating and cooling rates of 3°C/sec and 2°C/sec respectively, which correspond to a sample
20 heating or cooling rate of 1.2°C/sec.

The degree of control of the device allows it to perform ligase chain reactions.

25 The sample tubes can be made in glass. This enhances heat transfer to the samples.

The sample tubes can be replaced with sealed 0.5 microlitre microfuge tubes. As these are larger than
30 the standard sample tubes, only every other recess is used.

The device shown in Fig.3 is for heating samples that are held on microscope slides. Each sample is held
35 between a slide 70 and a cover 71.

The device comprises two heater blocks 80, each comprising a continuous sheet of metal 81 that is supported by a casing 84 and that is overlaid by a serpentine electric element 82. A flat sheet of aluminium 83 lies over each element and it is on this that the slides 70 lie.

The slides 70 are covered by a housing 90 that is used to place samples on the blocks 80 for heating and remove them after heating. The housing comprises edge support members 91 that engage the ends of the slides when the housing is lifted. The edge support members define two rectangular apertures in plan view which can each support a number of slides. Each aperture contains locating means (not shown in Fig.3) which ensure the slides are kept in a regular arrangement and do not move about. The structure of the housing is completed by a lid member 92 having a support 93. The whole structure forms a humidity chamber when the lid member 91 is in place.

To use the device the operator first loads the housing 90 whilst it is removed from the frame 84. A number of housings can be loaded in preparation for sample heating. As the housing is lowered over the device the slides 70 become supported on the aluminium sheets 83. The housing is further lowered until the lid member 92 rests on the edge of the casing 84 in the position shown in Fig.3. The samples are then heated in the required manner. When heating is completed the housing is lifted away from the casing and the slides 70 removed.

In both embodiments of the invention the type of heating element 22 can be varied. A plurality of elements can replace the serpentine element. A woven conductive cloth can be incorporated in the heater
5 block.

A number of modifications can be made to the devices described. A number of devices can be incorporated into a single unit for dealing with a larger number of
10 samples. In a particular embodiment a single unit incorporates four heating blocks of the type described. All four blocks are controlled by a single controller but measurements are only taken from a single heating block as representative of all the blocks. Such a unit
15 is only workable because of the high degree of uniformity achievable in the heating of each block.

The devices have many advantages over known devices. In particular, the temperature of different samples at
20 different positions cross the heater block 20 have a high degree of uniformity. The effect of this is to improve the uniformity of product from the sample tubes. This in turn allows more samples to be accommodated in a single heater block (ninety six
25 compared with seventy two in the cited prior device). This also reduces the energy consumption of the device.

The uniformity of heating to the sample tubes is also enhanced by making the heater block in silver, which
30 has a high thermal conductivity, and by employing a jointless construction. The use of a solid silver block rather than a soldered copper block enhances heat transfer through the block. By eliminating the difficult soldering operations the cost of the block is
35 reduced.

Incorporating the heating means into the heater block, rather than using a radiant heater, allows the fan to be positioned under the centre of the block. This results in an even airflow pattern over all parts of the block. The configuration of the airflow path eliminates dead spots where the cooling effect would be reduced.

The use of thermistors for temperature sensing rather than thermocouples increases the accuracy of operation and eliminates the need to periodically recalibrate the controller.

CLAIMS

1. A device for controlling the temperature of a plurality of samples of a reacting mixture, comprising
5 a heater block (20) for receiving said samples, means for heating the block, means (50) for cooling the block by forced convection, and temperature sensing means to monitor the temperature of one or more samples and signal a controller which controls the means for
10 heating and the means for cooling to regulate the sample temperature, characterised in that the means for heating the block comprise one or more heater elements (22) positioned in thermal contact with the block so that heat transfer between the element(s) and the
15 block is substantially by conduction.
2. A device according to claim 1, wherein the means for cooling the block (20) by forced convection comprises a fan (50) that is positioned under the
20 centre of the block.
3. A device according to claims 1 or 2, wherein the block (20) is made of solid metal.
- 25 4. A device according to any preceding claim, wherein the temperature sensing means comprise one or more thermistors.
5. A device according to any preceding claim, wherein
30 the means for heating the block (20) comprises one or more elongate heating elements (22) following a sinuous path.
6. A device according to any of claims 3 to 5,
35 wherein the block (20) is silver.

7. A device according to any preceding claim, wherein the heater block (20) contains a plurality of recesses (21).

5 8. A device according to claim 7, wherein the samples are contained in reaction vessels which are placed in the recesses.

10 9. A device according to claims 7 or 8, wherein the device can heat or cool a 100 microlitre sample of biological reactant material at a rate of 1.2°C/second.

15 10. A device according to any of claims 7 to 9, wherein the device allows ligase chain reaction to be undertaken in the samples.


11. A device according to any of claims 1 to 6, wherein the top of the heater block has a flat area for receiving the samples.

20 12. A device according to claim 11, wherein the samples are held on microscope slides.

25 13. A device for controlling the temperature of a plurality of samples of a reacting mixture, comprising a heater block (20) having a plurality of recesses (21) for receiving said samples, a heater element (22) in thermal contact with the block, means (50) for cooling the block by forced convection, and temperature sensing
30 means to monitor the temperature of one or more of said samples and signal a controller which controls the heater element and the forced convection means to regulate the sample temperature, characterised in that the heater block comprises a continuous layer of metal.

1 / 2

FIG. 1

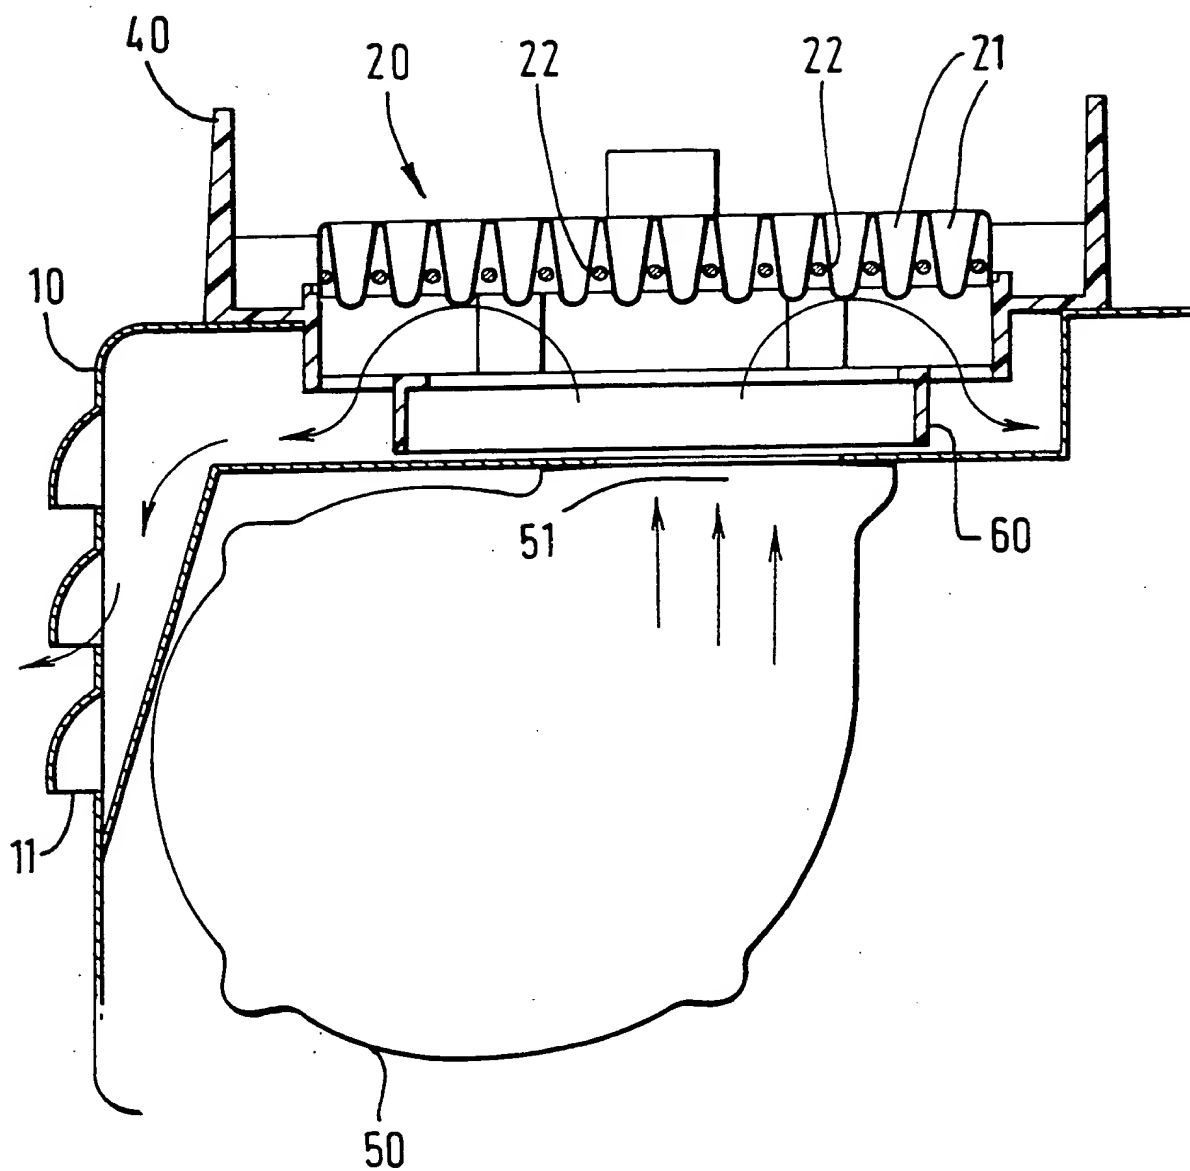

2 / 2

FIG. 2


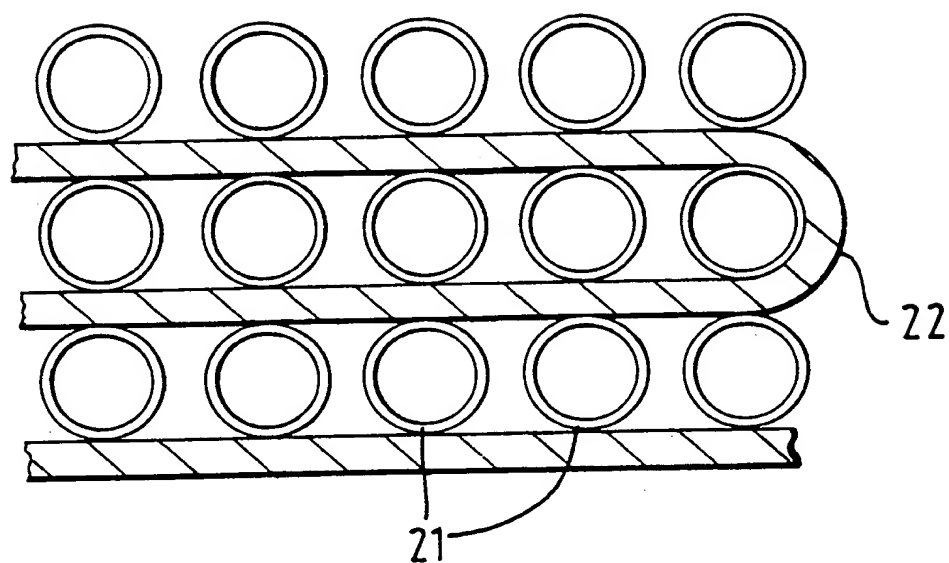


FIG. 3

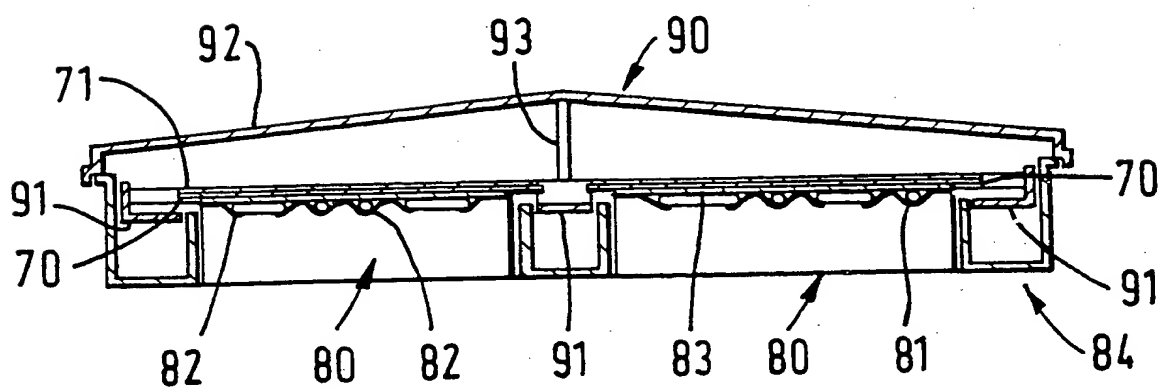

INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB 92/01996

I. CLASSIFICATION OF SUBJECT MATTER (if several classification symbols apply, indicate all)⁶

According to International Patent Classification (IPC) or to both National Classification and IPC
 Int.C1. 5 G05D23/19; B01L7/00

II. FIELDS SEARCHEDMinimum Documentation Searched⁷

Classification System	Classification Symbols
Int.C1. 5	G05D ; B01L

Documentation Searched other than Minimum Documentation
 to the Extent that such Documents are Included in the Fields Searched⁸

III. DOCUMENTS CONSIDERED TO BE RELEVANT⁹

Category ¹⁰	Citation of Document, ¹¹ with indication, where appropriate, of the relevant passages ¹²	Relevant to Claim No. ¹³
X	WO,A,8 909 437 (DEAN AND EVANS) 5 October 1989 cited in the application	1,3,7,13
Y	see the whole document	2,9,10 4-6,8, 11,12
A		
Y	US,A,4 865 986 (COY ET AL.) 12 September 1989 see column 1, line 7 - column 2, line 12 see column 3, line 47 - column 4, line 27; figure 4	2,9,10
A	US,A,4 950 608 (KISHIMOTO) 21 August 1990 see column 1, line 48 - column 2, line 3	1-13

¹⁰ Special categories of cited documents:

"A" document defining the general state of the art which is not
 considered to be of particular relevance

"E" earlier document but published on or after the international
 filing date

"L" document which may throw doubts on priority claim(s) or
 which is cited to establish the publication date of another
 citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or
 other means

"P" document published prior to the international filing date but
 later than the priority date claimed

"T" later document published after the international filing date
 or priority date and not in conflict with the application but
 cited to understand the principle or theory underlying the
 invention

"X" document of particular relevance; the claimed invention
 cannot be considered novel or cannot be considered to
 involve an inventive step

"Y" document of particular relevance; the claimed invention
 cannot be considered to involve an inventive step when the
 document is combined with one or more other such docu-
 ments, such combination being obvious to a person skilled
 in the art.

"&" document member of the same patent family

IV. CERTIFICATION

Date of the Actual Completion of the International Search

01 FEBRUARY 1993

Date of Mailing of this International Search Report

10.02.93

International Searching Authority

EUROPEAN PATENT OFFICE

Signature of Authorized Officer

SCHOBERT D.A.V.

ANNEX TO THE INTERNATIONAL SEARCH REPORT ON INTERNATIONAL PATENT APPLICATION NO.

GB 9201996
SA 65949

This annex lists the patent family members relating to the patent documents cited in the above-mentioned international search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

01/02/93

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO-A-8909437	05-10-89	AU-B- 618807	09-01-92
		AU-A- 3410989	16-10-89
		EP-A- 0400087	05-12-90
		GB-A- 2233476	09-01-91
		JP-T- 3504774	17-10-91
US-A-4865986	12-09-89	EP-A- 0363143	11-04-90
		JP-A- 2176910	10-07-90
US-A-4950608	21-08-90	None	